


Sport-Thieme GmbH 38367 Grasleben / Germany Tel: +49 (0)53 5718 181 Fax: +49 (0)53 5718 190

Prod. code: 122 4362

Instruction manual for the ballet barre base

Thank you very much for choosing a Sport-Thieme product. Please read the instructions fully before you assemble the equipment so you can enjoy the product and its guaranteed safety:

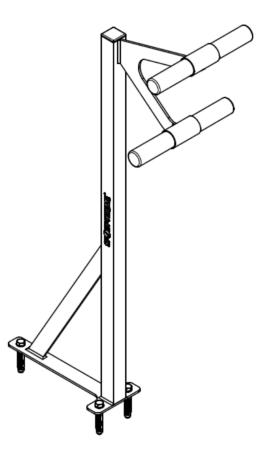

1. When you open the package, please ensure all the necessary parts are included.

Pos.	Number	<u>Description</u>
1	1	ballet barre base
2	3	hex screw DIN 571 – 10 x 80
3	3	washer DIN 125 – A 10.5
4	3	wall plug
5	4	wood screw 5 x 25
6	2	ballet barre Ø 40 mm (not included!)


Operating/assembly instructions Ballet barre base

Prod. code: 122 4362




Sport-Thieme GmbH 38367 Grasleben / Germany Tel: +49 (0)53 5718 181 Fax: +49 (0)53 5718 190


exploded view drawing

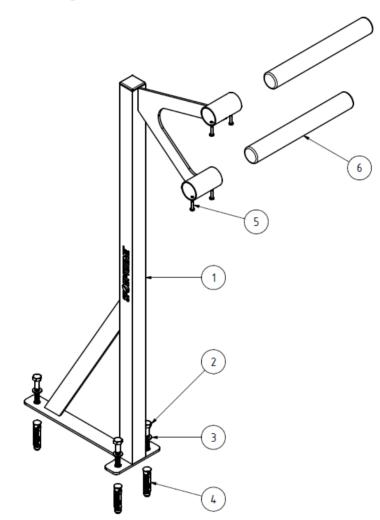

2. Assembly steps

Step 1








Sport-Thieme GmbH 38367 Grasleben / Germany Tel: +49 (0)53 5718 181 Fax: +49 (0)53 5718 190

- Ensure that the base is mounted to a solid floor!
- Starting with the desired position for the base (pos. 1), mark the drilling holes.
- Drill the holes using a suitable masonry drill bit and put in the wall plugs (pos. 4).
- Now, put the three hex screws (pos. 2) with washers (pos. 3) through the base's holes and tighten them in the wall plugs using a hex key.

Step 2



- Screw the two ballet barres (pos. 6) to the base (pos. 1) using the four included wood screws (pos. 5).
- In order to prevent possible chipping, the ballet barres can be pre-drilled using a 2 mm wood drill bit if required.
- If several bases are used, determine the distances between them individually according to your needs and dependent on the barres you have selected. The distance should not be more than 1.50 m.

Caution: Do not overload or climb the equipment!



Sport-Thieme GmbH 38367 Grasleben / Germany Tel: +49 (0)53 5718 181 Fax: +49 (0)53 5718 190

Prod. code: 122 4362

3. Additional information

Floor mounting:	use fixings suitable for your floor to bolt the bases to the floor.
Load information:	the included fixings are suitable for concrete of C25/30 quality and can take a tensile load of 0.5 kN.
max. load:	50 kg
Use:	this product is only suitable for its intended use.

4. Maintenance and care instructions



Carry out a visual check at regular intervals. Due to our continuous quality control of the products, technical changes may occur which may lead to slight deviations in the instructions.

Check at regular intervals that the screw connections are tight.

Check the equipment for possible damage and replace worn-out parts.

Check the condition of padded elements as use can lead to signs of wear.

We are happy to answer any questions you may have.

Your **SP RT-THIEME** Team